


# High Wall Inverter Pyrenees

YHKE 09 to 24 ZEEAMHORX  
A complete range from 2.6 kW to 7.0 kW

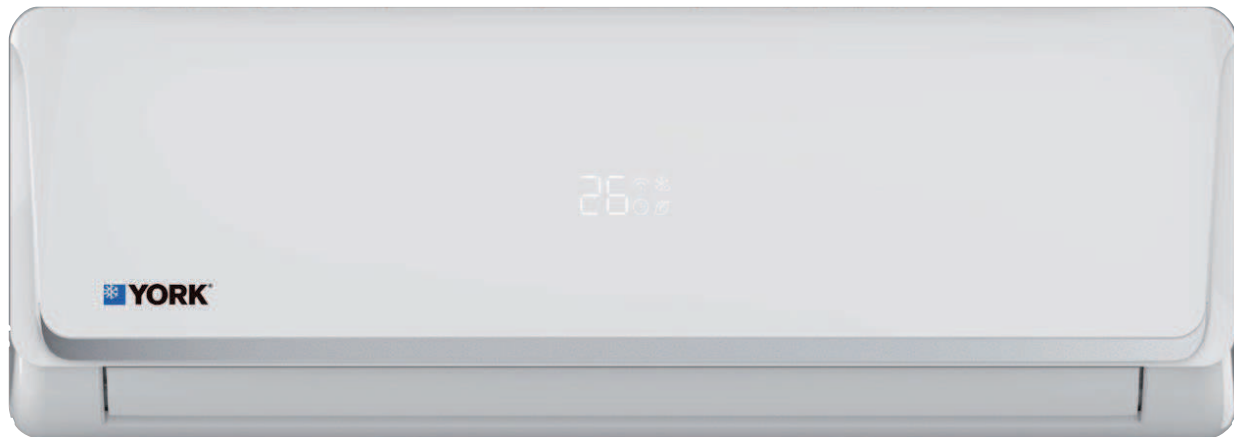

## Features

- High SEER & SCOP, Class A++
- DC Inverter compressor
- Low noise levels
- Multispeed fan
- Automatic restart
- Automatic air sweep
- LED display
- Two-way draining
- High density filter
- Low Ambient Kit
- Refrigerant leakage detect
- Service valve protection cover
- Rustproof casing
- **Blue fin protection (indoor and outdoor units)**



## Remote controller

- Wireless
- Follow me function
- 5 operation modes (Cool/Heat/Auto/Dry/Fan)
- 5 Fan speeds selection
- Quiet/sleep button
- ON/OFF timer
- Air flow direction setting
- LCD display
- Turbo mode
- Room temperature setting



# High Wall Inverter Pyrenees

## YHKE 09 to 24 ZEEAMHORX



### Technical features

Set reference		YHKE_ZEEAMHORX				
Indoor unit	Sizes	YHKE09XEEAMH-RX	YHKE12XEEAMH-RX	YHKE18XEEAMH-RX	YHKE24XEEAMH-RX	
Outdoor unit	Sizes	YHKE09YEEAMHO-X	YHKE12YEEAMHO-X	YHKE18YEEAMHO-X	YHKE24YEEAMHO-X	
Cooling capacity	kW	2.6 (1.2-3.3)	3.5 (1.4-4.5)	5.3 (1.8-6.2)	7.0 (2.7-8.1)	
Heating capacity	kW	2.9 (0.9-3.8)	3.8 (1.1-4.9)	5.6 (1.4-9.4)	7.9 (2.2-9.3)	
Compressor	Type	Rotary				
Refrigerant		R410A				
Power supply	V/Ph/Hz	230 / 1 / 50 + E				
Power input	cooling	kW	0.75 (0.09-1.27)	1.13 (0.1-1.74)	1.54 (0.15-2.38)	2.26 (0.23-3.11)
	heating	kW	0.75 (0.14-1.34)	1.06 (0.17-1.76)	1.50 (0.22-2.43)	2.32 (0.32-3.32)
SEER		7.4	6.8	6.8	6.6	
SCOP		4.2	4.2	4.0	4.0	
Energy Class	cooling	A++	A++	A++	A++	
	heating	A+	A+	A+	A+	
Indoor airflow	m³/h	420 / 310 / 240	520 / 460 / 270	750 / 500 / 420	1 060 / 830 / 610	
Sound pressure at 1 m	Indoor (H/M/L)	dB(A)	37 / 33 / 23	39 / 35 / 24	42 / 34 / 29	48 / 43 / 32
	Outdoor	dB(A)	58	60	62	66
Dimensions	Indoor	H (mm)	290	297	319	335
		W (mm)	722	802	965	1 080
		D (mm)	187	189	215	226
	Outdoor	H (mm)	555	554	554	702
		W (mm)	770	800	800	845
		D (mm)	300	333	333	363
Net weight	Indoor unit	kg	7.4	8.2	10.7	13
	Outdoor unit	kg	26.6	29.1	37.8	48.4
Piping	Type of connection	Flare				
	Diameter	Gas	3/8"	3/8"	1/2"	5/8"
		Liquid	1/4"	1/4"	1/4"	3/8"
Refrigerant charge	g	800	950	1 480	2 000	
Pipe run	Length	m	25	25	30	50
	Height	m	10	10	20	25
Operating limit - cooling mode	min./max.	-15°C / +50°C				
Operating limit - heating mode	min./max.	-15°C / +30°C				

Nominal cooling capacity based on : - Indoor Air Temp. 27°C DB / 19°C WB - Outdoor Air Temp. 35°C DB

Nominal heating capacity based on : - Indoor Air Temp. 21°C DB - Outdoor Air Temp. 7°C DB/6°C WB

Piping length : 5 m with initial charge

### Accessories

Sizes	09	12	18	24
Wired control			Optional	
Central control			Optional	



Manufacturer reserves the rights to change specifications without prior notice.